

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 6722 (1972): Dimensions for aircraft jacking pads [TED
14: Aircraft and Space Vehicles]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE





Indian Standard

DIMENSIONS FOR
AIRCRAFT JACKING PADS


1. Scope — Shape and dimensions for aircraft main jacking and axle jacking pads of the spigot type.

2. Main Jacking Pads

2.1 Types

- Type 1 — For reactions less than 4 500 kg
- Type 2 — For reactions of 4 500 to 50 000 kg
- Type 3 — For reactions of 50 000 to 90 000 kg

2.2 Dimensions

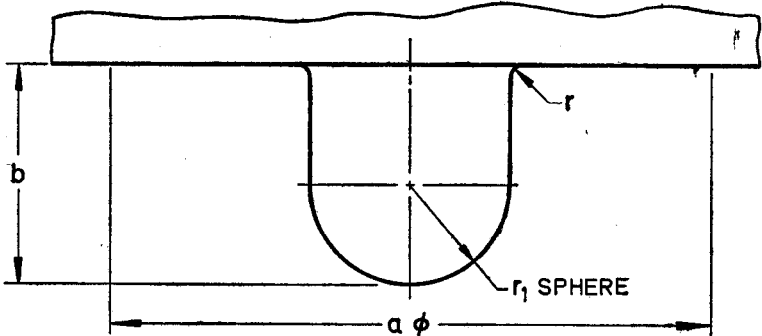

All dimensions in millimetres.


Type	Clear Space <i>a</i> Min	<i>b</i>	<i>r</i>	<i>r</i> ₁
1	76	28	1.5	12.7
2	76	30	1.5	19
3	305	35	1.5	32

3. Axle Jacking Pads


3.1 Types

- Type 4 — For reactions less than 4 500 kg
- Type 5 — For reactions of 4 500 to 50 000 kg
- Type 6 — For reactions of 50 000 to 90 000 kg

3.2 Dimensions

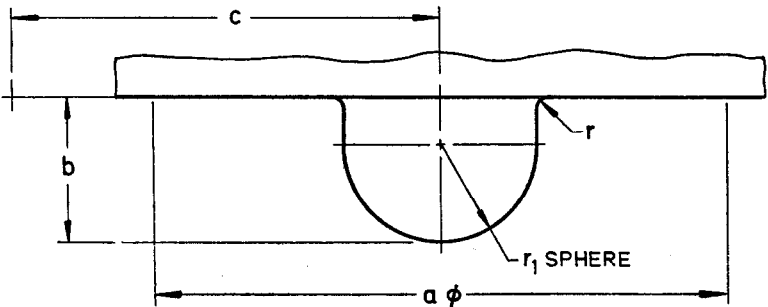

All dimensions in millimetres.



Type	Clear Space <i>a</i> Min	<i>b</i>	Wheel or Tyre Clearance <i>c</i> Min	<i>r</i>	<i>r</i> ₁
4	76	19	57	1.5	12.7
5	76	22	89	1.5	19
6	230	35	115	1.5	32

This standard conforms to ISO/R 43-1957.

Adopted 30 November 1972

© March 1973, ISI